



Stamatic A/S

Single Crate Filler type CF 2085

For gable top cartons.



Typical application

To be used for high speed loading of gable top cartons into standard dairy crates.

Process


The cartons are pregrouped on an accumulation table and then side indexed into the gripper mechanism which grips the cartons. The cartons are gently lowered into the crate while the next load of cartons are being pregrouped.

Technical specifications

- Body section is constructed in stainless material.
- Packs up to 8000 1 litre cartons per hour.
- Crate max width up to 500 mm.

Dimensions (l*w*h)

- Crate filler CF2080 1635 * 1355 * 1700
- Crate stacker 950 * 1020 * 1800

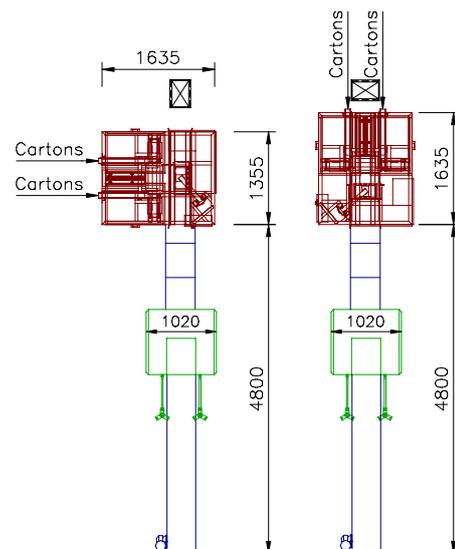

Possible installations of crate filler in lines with
Crate Stackers

Stamatic A/S, Venusvej 5A, DK-8700 Horsens, Denmark
Phone: +45 87802580, fax: +45 80802570, e-mail: info@stamatic.dk